




DESCRIPTION:

MAIN FEATURES

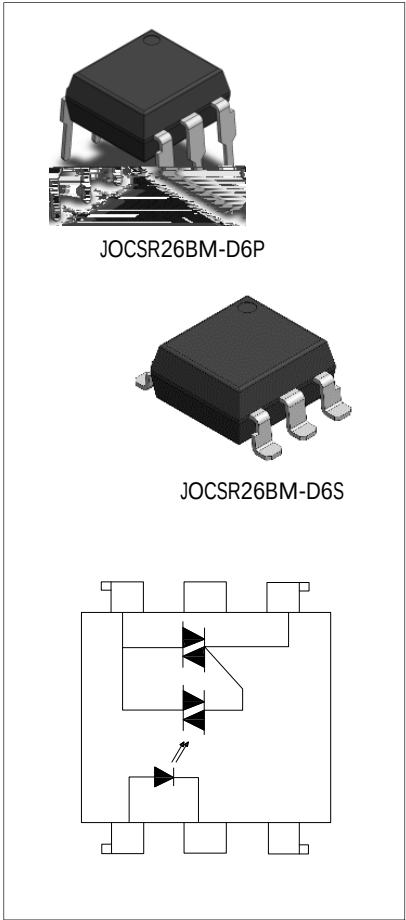

ABSOLUTE MAXIMUM RATINGS

	)			




NOTE1 100 μ s pulse, 100Hz frequency

NOTE2 AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS




ORDERING INFORMATION

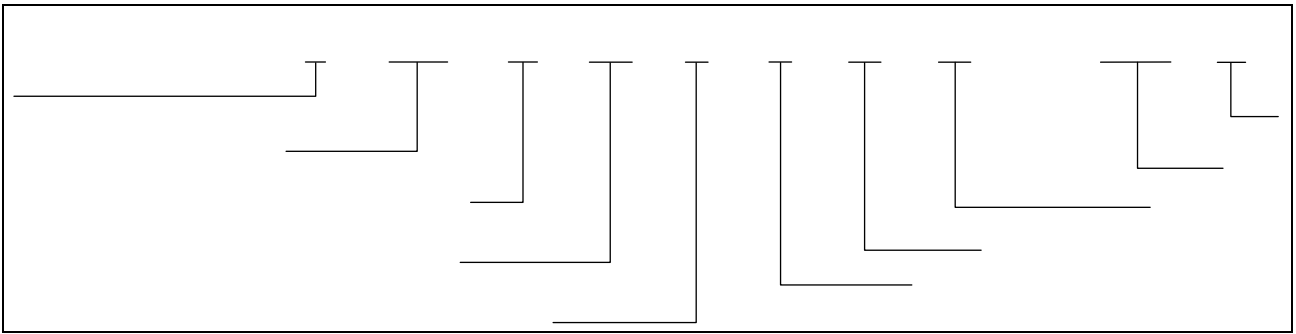



Packing Quantity			
Option	Quantity	Quantity – Inner box	Quantity –Outer box
DIP	60 Units/Tube	40 Tubes/Inner box	5 Inner box/Outer box =12k Units
SMD	1200 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box =12k Units




MARKING

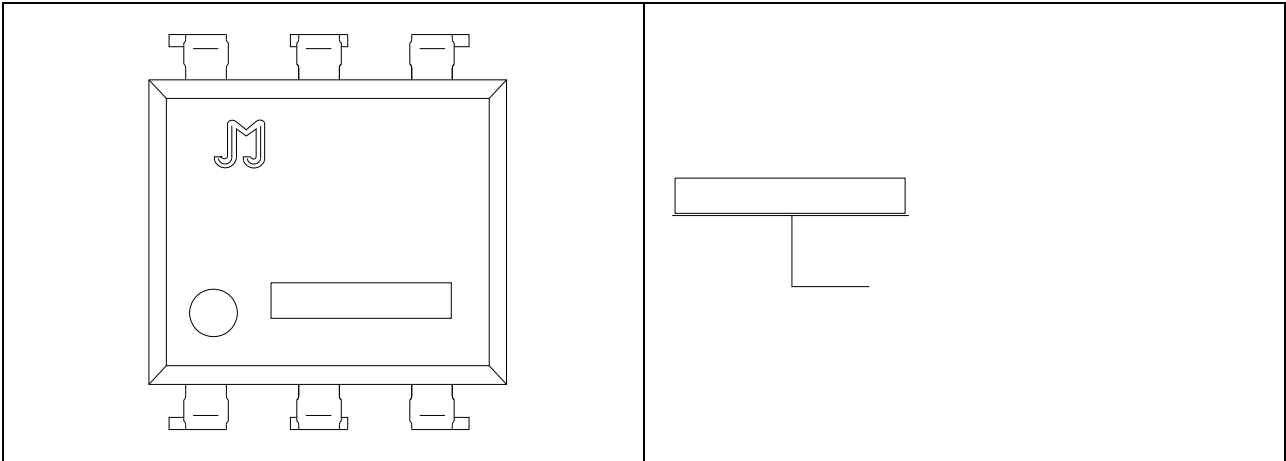








Characteristics Curves

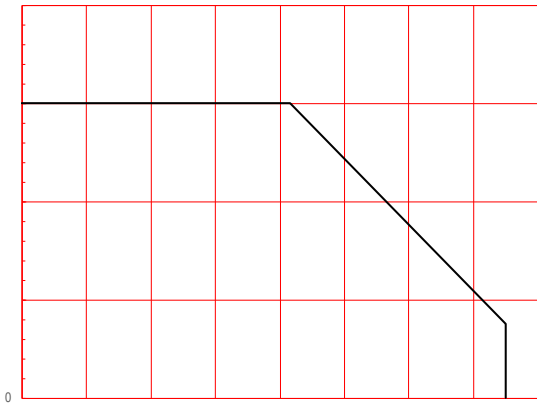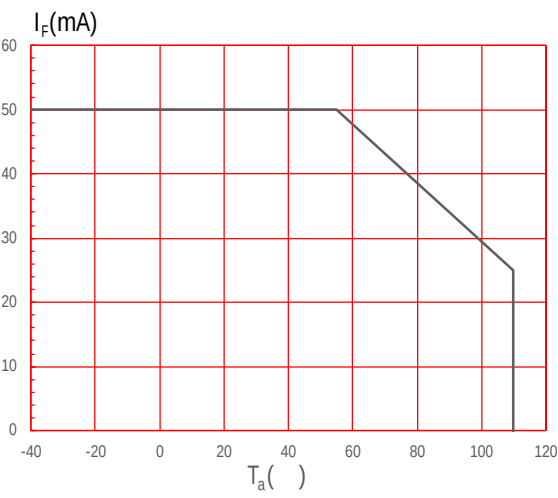

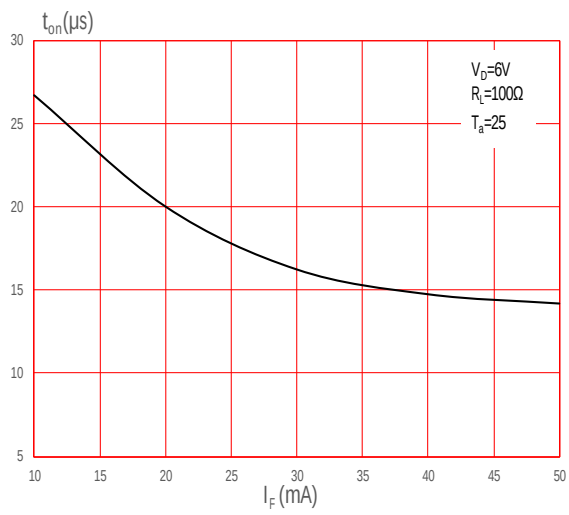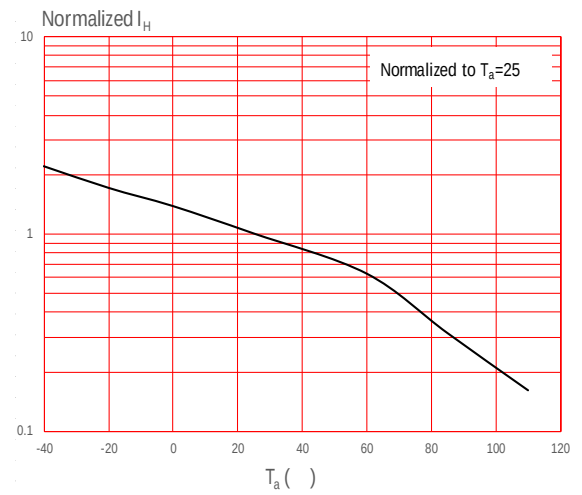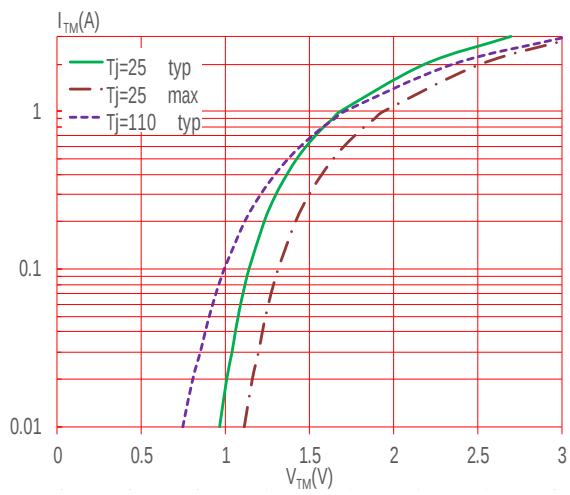


TEST CIRCUITS

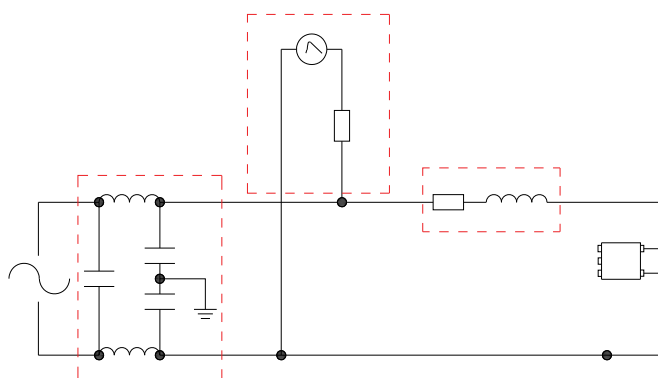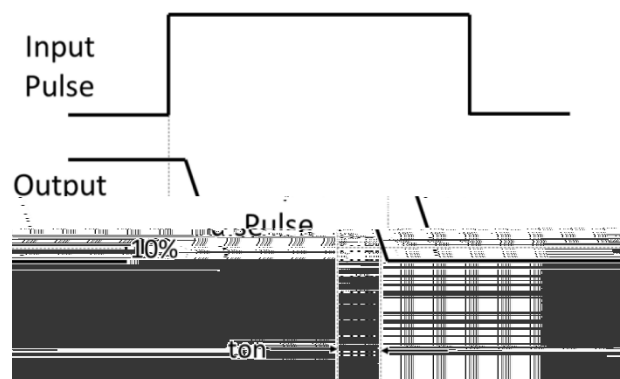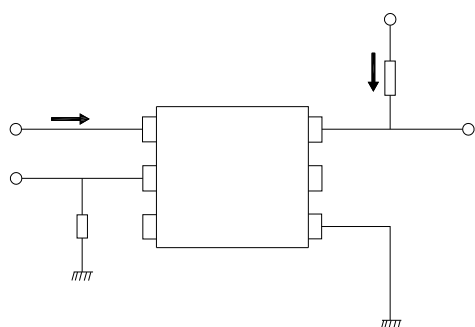

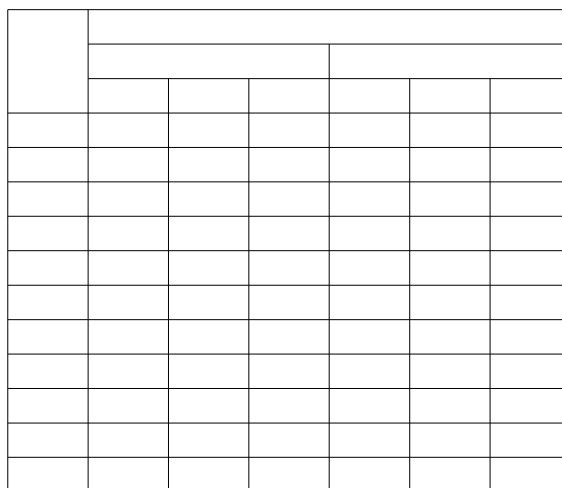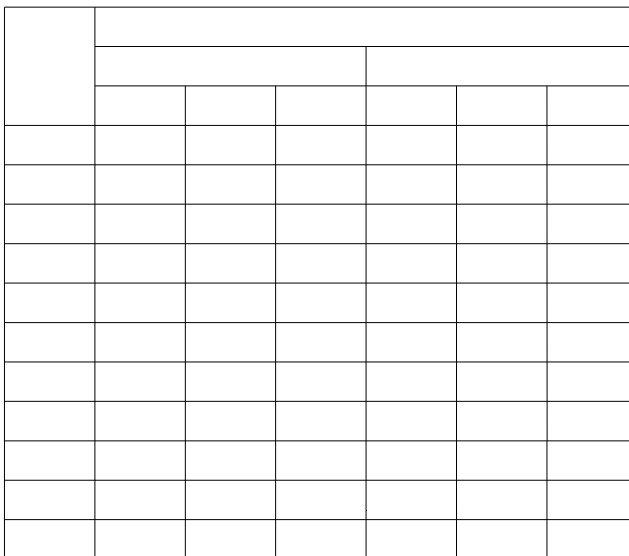




RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

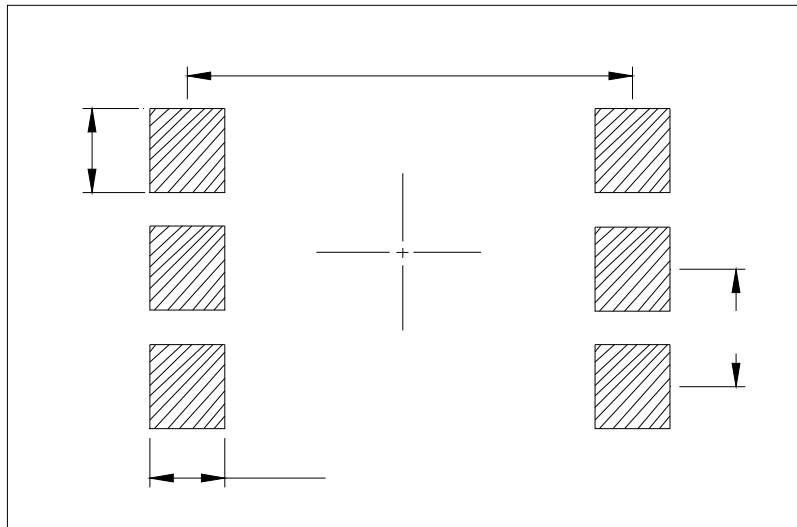


TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

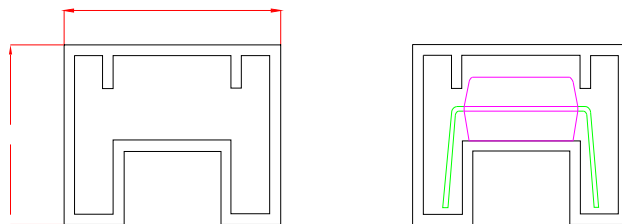




CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

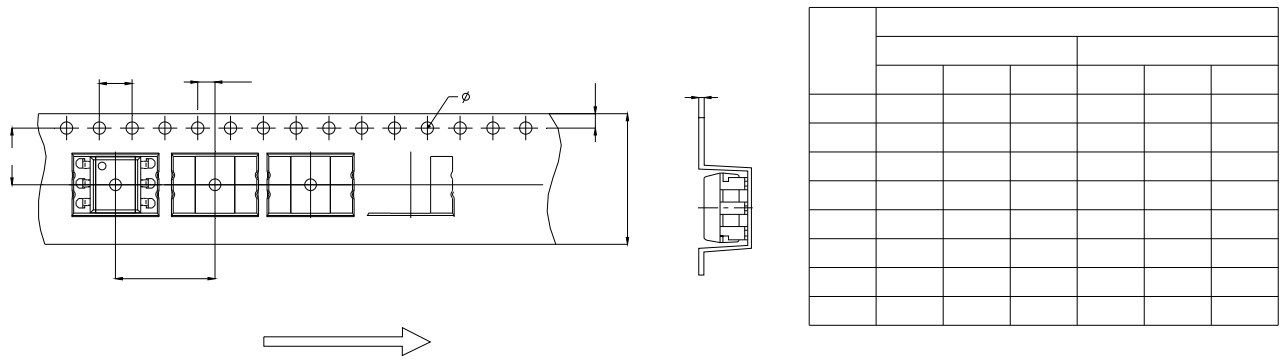




REFLOW INFORMATION

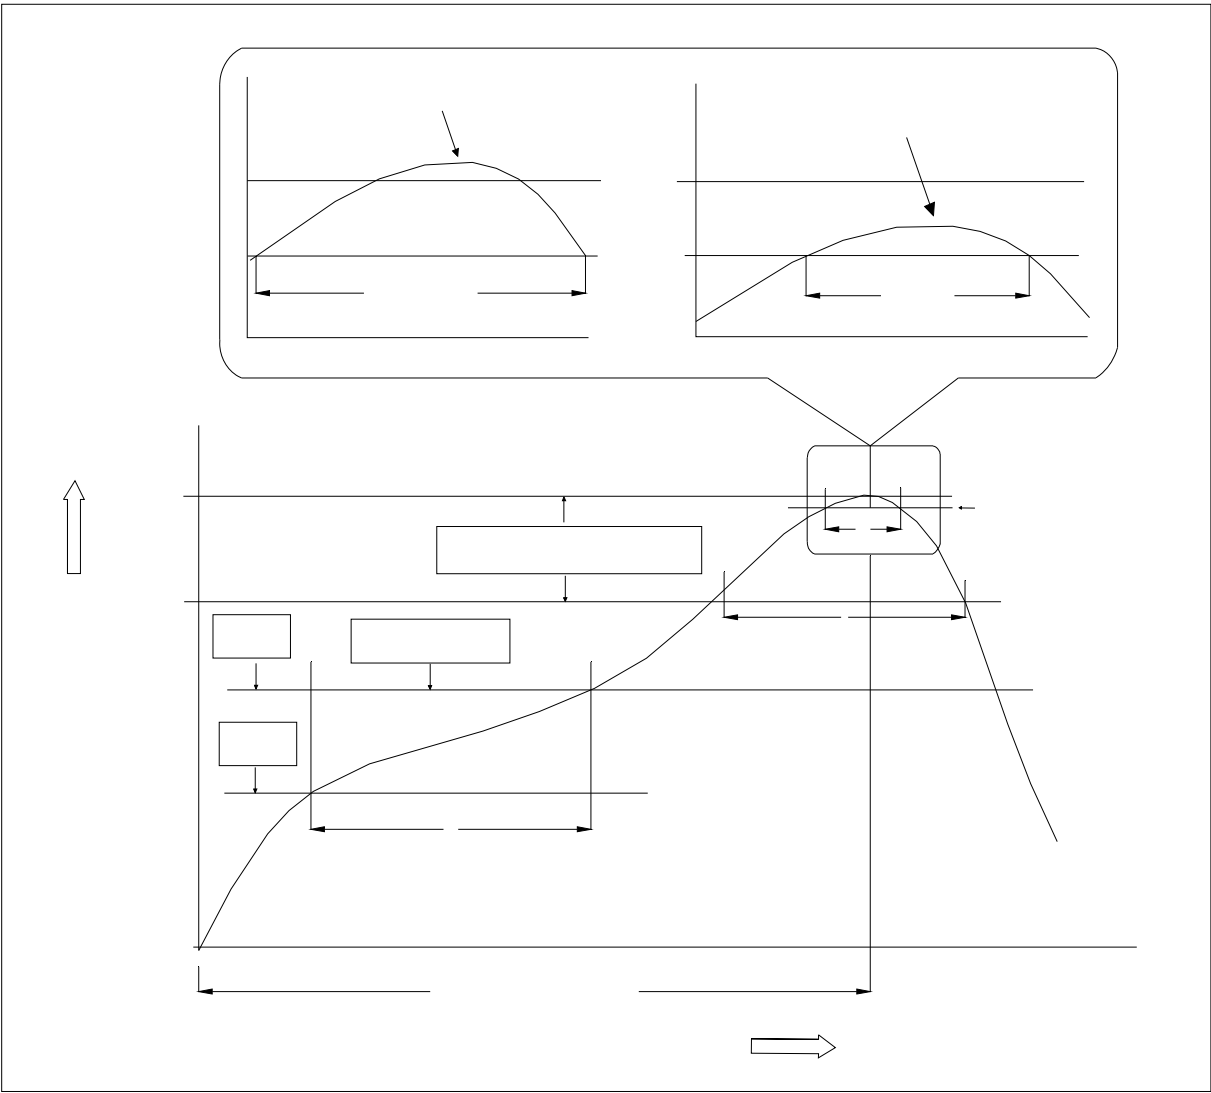



WAVE SOLDERING

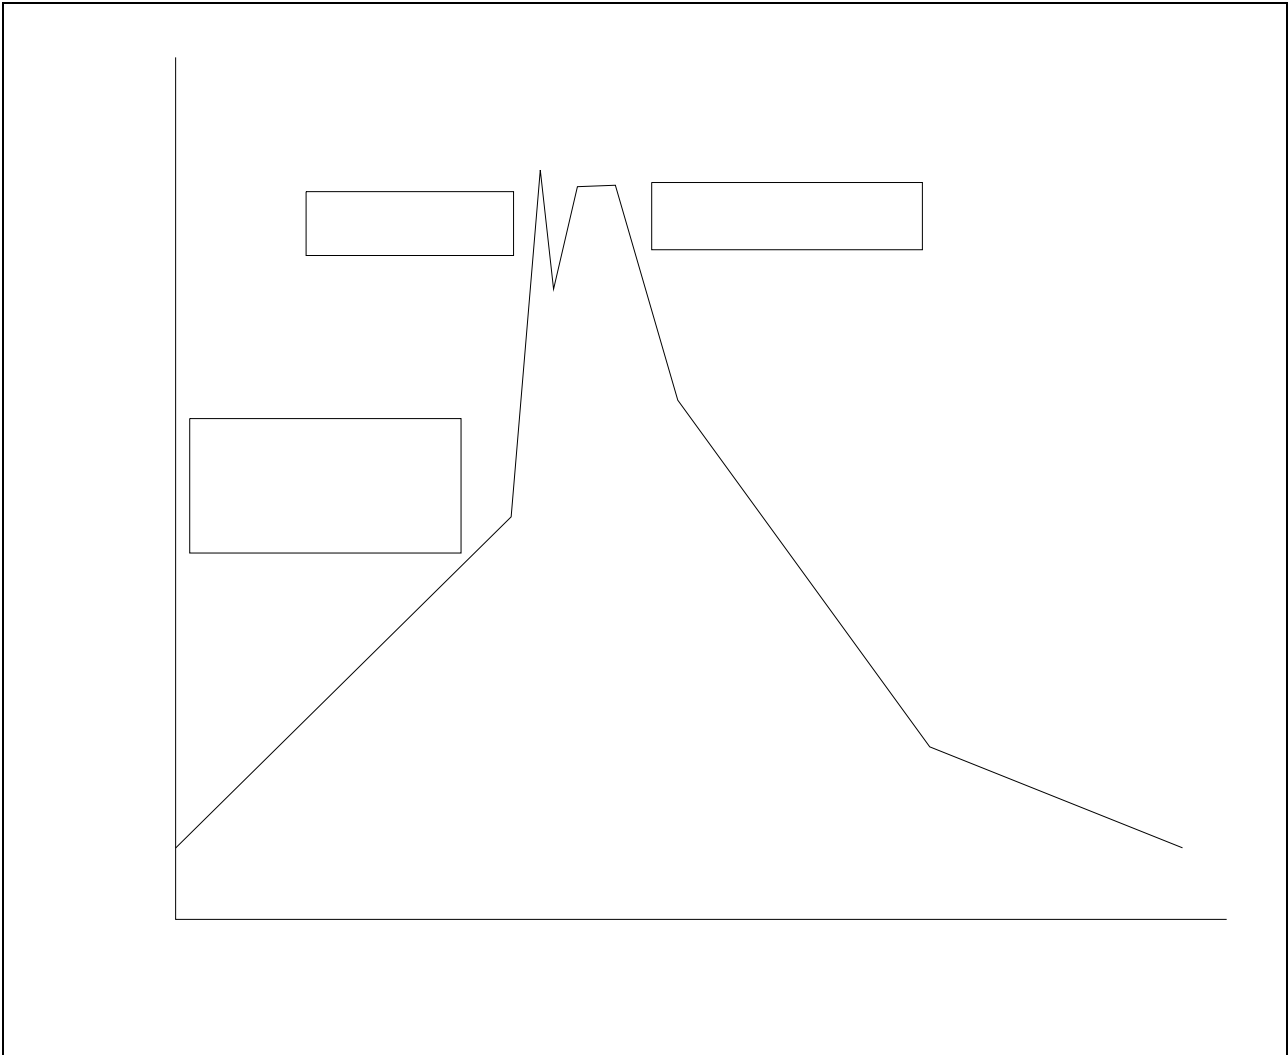

HAND SOLDERING BY SOLDERING IRON	

