Trench FS IGBT

Features

- High Power Density
- High mechanical robustness
- Compact design
- Isolated heatsink using DBC technology
- Very low forward voltage drop
- Fast & soft reverse recovery anti-parallel FWD

Product Summary

Parameter	Value	Unit
V_{CES}	1200	V
I_C(@ T_C= 100)	15	A
I_{CRM}(@ t_P= 1ms)	30	A
$V_{CE(sat)}$(Typ)	1.85	V

Applications

- Active Rectifier
- Air Conditioning
- Motor Drives

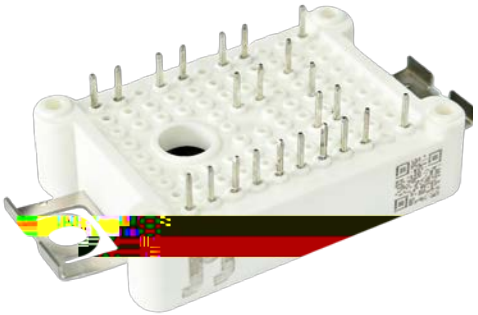

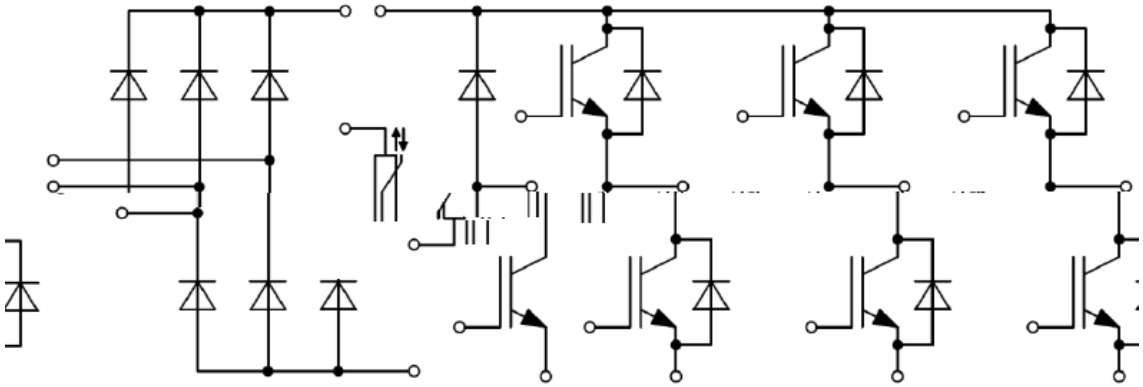

IGBT, Inverter Absolute Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions	Symbol	Values	Unit
Collector-emitter voltage	T_{vj} = 25°C	V_{CES}	1200	V
Gate-emitter peak voltage		V_{GES}	±20	V
Continuous collector current	T_C = 25°C, T_{vj} = 175°C	I_C	28	A
	T_C = 100°C, T_{vj} = 175°C	$I_{C\ nom}$	15	
Repetitive peak collector current	t_P = 1ms	I_{CRM}	30	A
Total power dissipation	T_C = 25°C, $T_{vj\ max}$ = 175°C	Ptot	130	W

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

IGBT, Inverter Electrical Characteristics (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions		Symbol	Values			Unit
				Min.	Typ.	Max.	
Collector-emitter saturation voltage	I_C = 15A, V_{GE} = 15V	T_{vj} = 25°C	$V_{CE(sat)}$		1.85	2.25	V
		T_{vj} = 125°C			2.30		
		T_{vj} = 150°C			2.35		
Gate threshold voltage	V_{CE}=V_{GE}, I_C=0.3mA		$V_{GE(th)}$	5.2	5.8	6.4	V
Gate-emitter leakage current	V_{CE} = 0V, V_{GE} = 20V		I_{GES}			400	nA
Collector leakage current	V_{CE}=1200V V_{GE}=0V		I_{CES}			1	mA
Input capacitance	f = 1MHz, T_{vj} = 25°C, V_{CE} = 25 V, V_{GE} = 0 V		C_{ies}		0.89		nF
Output capacitance			C_{oes}		0.03		nF
Gate charge	V_{GE} = -15V…+15V		Q_G		0.12		uC
Turn-on delay time, inductive load	V_{CE} = 600V, I_C = 15A , R_G = 51 Ÿ V_{GE} = ±15V , T_{vj} = 25		$t_{d(on)}$		98.4		ns
Rise time, inductive load			t_r		98.2		ns
Turn-off delay time, inductive load			$t_{d(off)}$		114		ns
Fall time, inductive load			t_f		174		ns
Turn-on energy loss per pulse			E_{on}		1.81		mJ
Turn-off energy loss per pulse			E_{off}		0.69		mJ
Turn-on delay time, inductive load	V_{CE} = 600V, I_C = 15A , R_G Ÿ V_{GE} = ±15V , T_{vj} = 125		$t_{d(on)}$		94.2		ns
Rise time, inductive load			t_r		107.2		ns
Turn-off delay time, inductive load			$t_{d(off)}$		132		ns
Fall time, inductive load			t_f		220		ns
Turn-on energy loss per pulse			E_{on}		2.61		mJ
Turn-off energy loss per pulse			E_{off}		0.86		mJ
SC date	W S ” XW V_{GE} ”15V V_{CC}=800V,V_{CEM} ” 9 T_{vj}=125		I_{SC}		55		A
Thermal resistance, junction to case	per module		$R_{th(j-c)}$		1.05	1.15	K/W
Temperature under switching conditions			$T_{vj\ op}$	-40		150	

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Diode, Rectifier Absolute Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions	Symbol	Values	Unit
Repetitive peak reverse voltage	T_{vj} = 25°C	V_{RRM}	1600	V
Maximum RMS forward current per chip	T_C = 80°C	I_{FRMSM}	30	A
Maximum RMS current at rectifier output	T_C = 80°C	I_{RMSM}	30	A
Repetitive peak forward current	t_P = 10 ms, T_{vj} = 25°C	I_{FSM}	300	A
I^2t value for fusing	t_P = 10 ms, T_{vj} = 25°C	I^2t	450	A^2s

Diode, Rectifier Electrical Characteristics (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage	T_{vj} = 150°C, I_F=15A	V_F		1.10		V
Reverse current	T_{vj} = 150°C, V_R=1600V	I_R		1.0		mA
Thermal resistance, junction to case	per module	$R_{th(j-c)}$		1.20	1.35	K/W
Temperature under switching conditions		$T_{vj\ op}$	-40		150	

IGBT, Brake-Chopper Absolute Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions	Symbol	Values	Unit
Collector-emitter voltage	T_{vj} = 25°C	V_{CES}	1200	V
Gate-emitter peak voltage		V_{GES}	±20	V
Continuous collector current	T_C = 25°C, T_{vj} = 175°C	I_C	28	A
	T_C = 100°C, T_{vj} = 175°C	$I_{C\ nom}$	15	
Repetitive peak collector current	t_P = 1ms	I_{CRM}	30	A
Total power dissipation	T_C = 25°C, $T_{vj\ max}$ = 125°C	P_{tot}	130	W

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

FRED, Brake-Chopper Absolute Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions	Symbol	Values	Unit
Repetitive peak reverse voltage	T_{vj} = 25°C	V_{RRM}	1200	V
Continuous DC forward current		I_F	10	A
Repetitive peak forward current	t_P = 1ms	I_{FRM}	20	A
I^2t value for fusing	T_{vj} =125 , t_P = 10ms, V_R = 0V	I^2t	16	A^2s

FRED, Brake-Chopper Electrical Characteristics (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions		Symbol	Values			Unit
				Min.	Typ.	Max.	
Forward voltage	I_F 10A, V_{GE} = 0V	T_{vj} = 25°C	V_F		1.90	2.25	V
		T_{vj} = 125°C			1.55		
		T_{vj} = 150°C			1.50		

Peak reverse recovery current

I_F 10A,
di/dt = 100 $ V
V_R = 600V,
V

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

NTC-Thermistor Characteristics (@ T_C = 25°C unless otherwise specified)

Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	
Rated resistance	T_C=25	R_{25}		5		K
Deviation of R100	T_C = 100°C, R_{100} = 493	R/R	-5		5	%
Power dissipation	T_C = 25°C	P_{25}			20	mW
B-value	$R_2 = R_{25} \exp [B25/50(1/T2 - 1/(298,15\ K))]$	$B_{25/50}$		3375		K
B-value	$R_2 = R_{25} \exp [B25/80(1/T2 - 1/(298,15\ K))]$	$B_{25/80}$		3411		K
B-value	$R_2 = R_{25} \exp [B25/100(1/T2 - 1/(298,15\ K))]$	$B_{25/100}$		3433		K

Module Characteristics

Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	
Isolation Voltage (All Terminals Shorted)	RMS, f = 50Hz,1minute	V_{iso}	2.5			KV
Thermal resistance, case to heatsink	per module	$R_{th(c-s)}$		0.037		K/W
Maximum Junction Temperature	Inverter, brake-chopper	$T_{vj\ max}$			175	
	rectifier				150	
Stray inductance module		L_{SCE}		30		nH
Module lead resistance, terminals - chip	per switch	$R_{CC'+EE'}$		8.0		P
		$R_{AA'+CC'}$		6.0		P
Storage Temperature		T_{stg}	-40		125	
Mounting force per clamp		F	20		50	N

Ordering Information

Device	Marking	Package	Weight	Inner Box	Pre Carton
JMG15PM12E1S1	JMG15PM12E1S1	E1(33.8mm)	24±3g/PCS	30PCS	150PCS

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Circuit Diagram

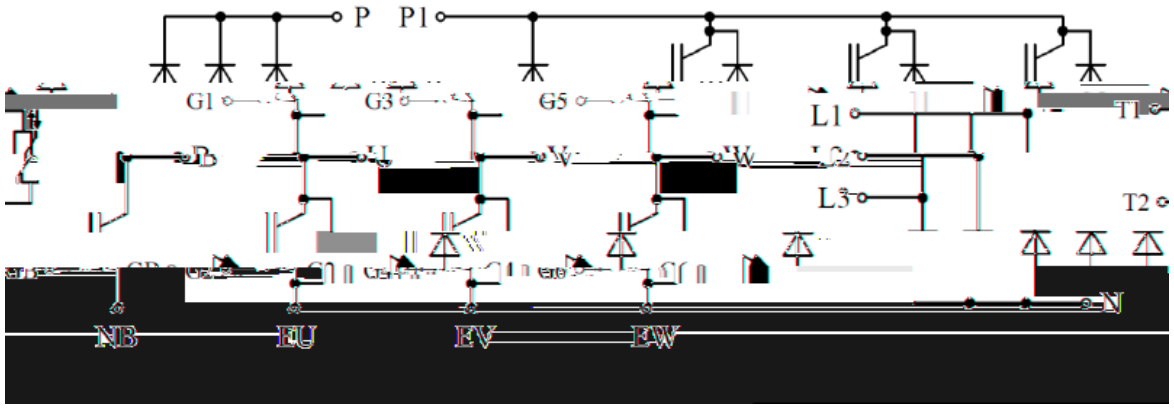

Package Outlines (mm)

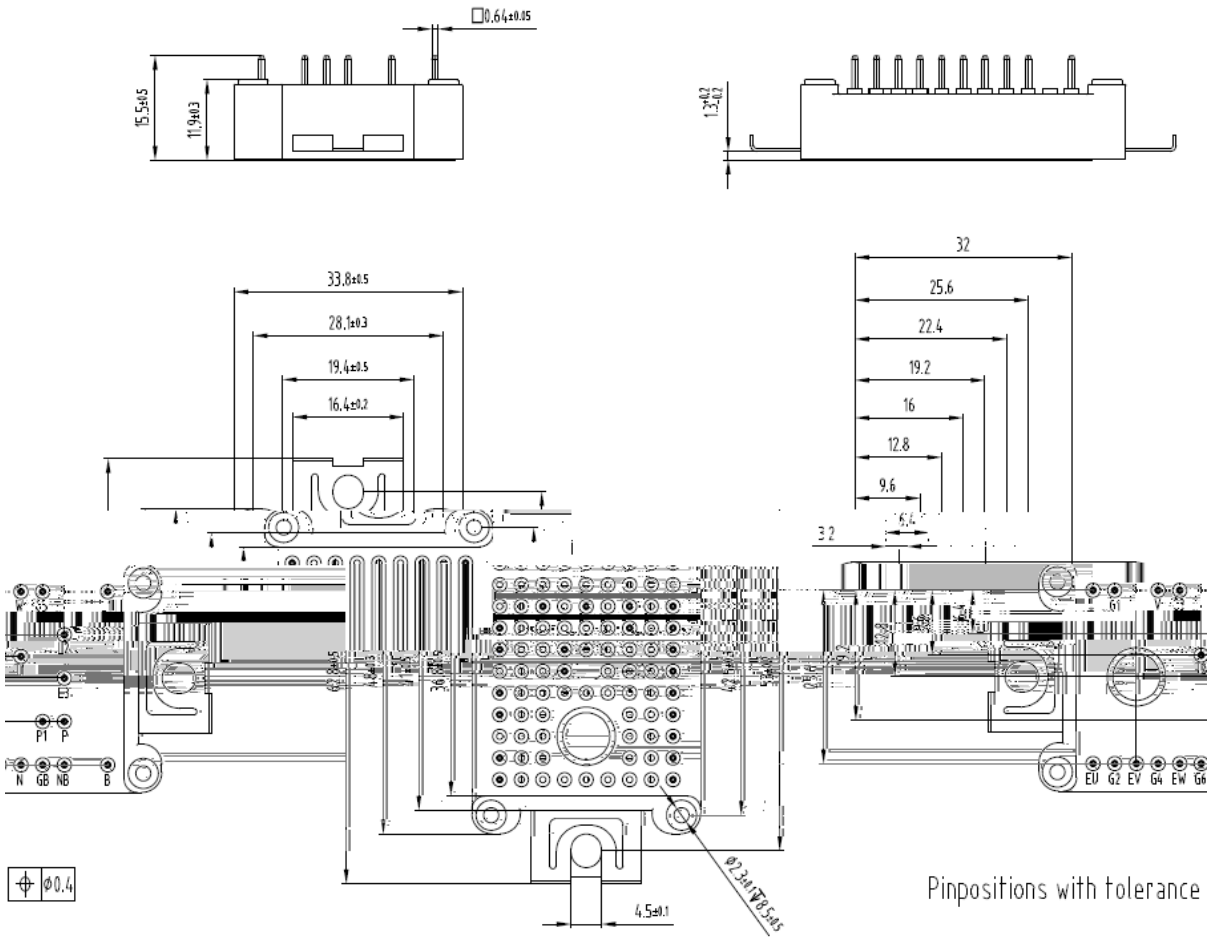

Unit of measurement: mm

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Typical Electrical & Thermal Characteristics

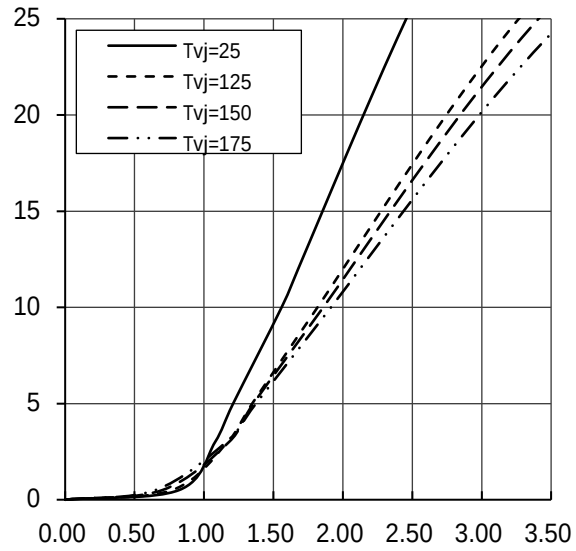

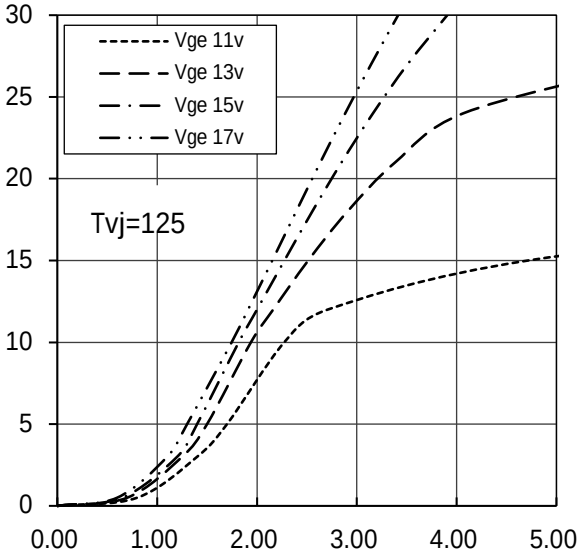

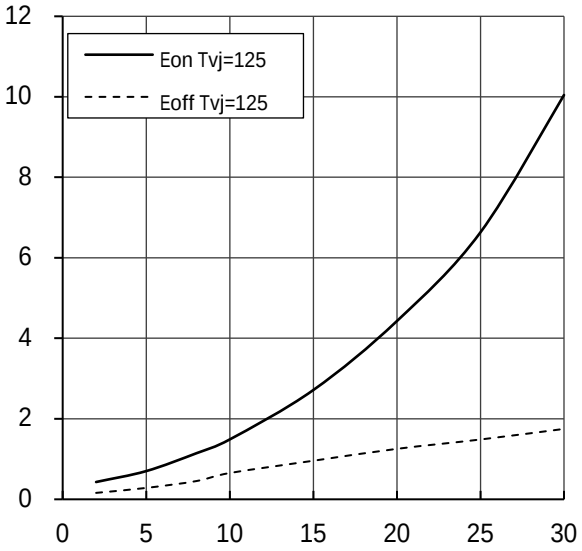

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Fig 5. FRED Foward Characteristics, Inverter(typcial)

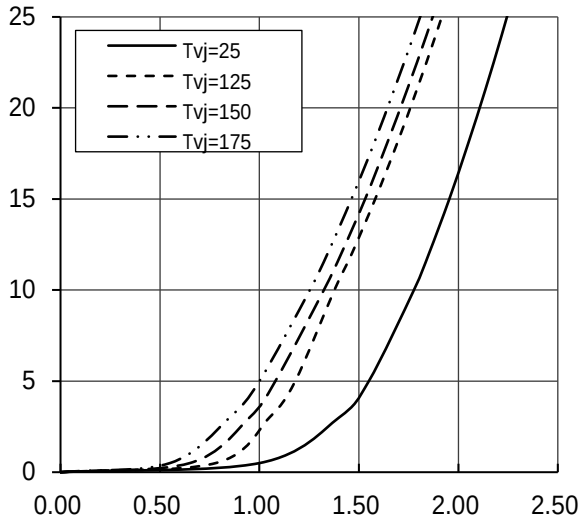

Fig 6. FRED Forward Characteristics, Inverter(typcial)

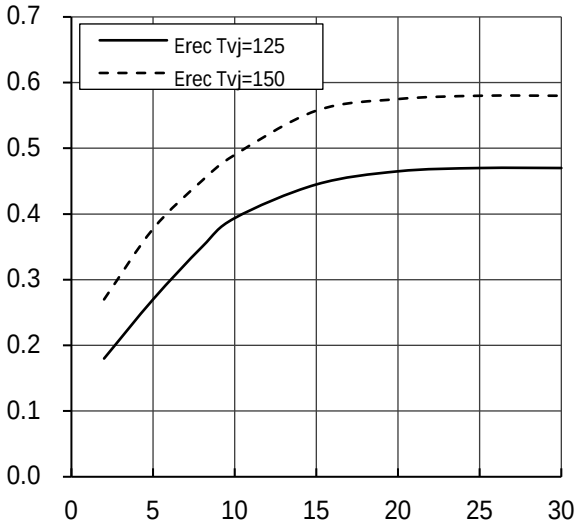

Fig 7. Diode Rectifier Forward Characteristics

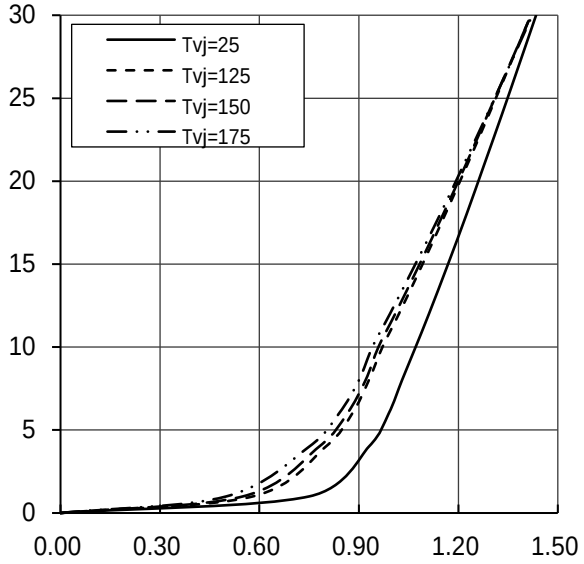

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Semiconductor Co., Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. This information in this document is subject to change without prior notice. Notwithstanding this, Jiangsu JieJie will fully comply with the terms outlined in a signed agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document is the initial release, dated 8 May 2026. This document supersedes and replaces all information previously supplied.

is registered trademark of Jiangsu JieJie Semiconductor Co., Lt ©2026 Jiangsu JieJie Semiconductor Co., Ltd. All rights reserved.